

JetPort 5201

Industrial 1-port RS-232 Serial Device Server



- Single, compact RS-232 to Ethernet Solution
- High serial speed up to 460.8kbps
- JetPort Commander, Windows utility for auto discovery, device configuration, multiple devices setup wizard and monitoring
- Versatile serial operation options: Virtual Com, Serial tunnel, TCP server, TCP client, UDP
- Up to 5 simultaneous serial connections
- Configuration by Windows, Web and Telnet
- Event warning by Email, SNMP trap and Syslog
- Virtual COM driver for Windows 2000/XP/2003/Vista

Overview

The JetPort 5201 is a smart one RS-232 to Ethernet device server. The serial speed can be as fast as 460.8kbps. The serial port can be configured as Virtual Com, Serial tunnel, TCP server, TCP client, and UDP mode to communicate with Ethernet. The JetPort 5201 supports up to 5 simultaneous Virtual COM, TCP server, TCP client connections for critical redundant solution.

The JetPort Commander is an easy-to-use utility for

Windows that covers all management, monitoring, and control functions for one or many JetPort servers. Setting up 100 JetPort can be as easy as setting up one JetPort. In addition to Windows configuration, the JetPort can be configured by Web and Telnet, giving administrators the flexibility for device management. The JetPort 5201 can be wall mounted or din-rail mounted by the din-rail kit.

Small, Compact and Easy to Use

The JetPort 5201 is a small RS-232 to Ethernet Device Server. The JetPort 5201 is equipped with compact form-factor, 78.5mm(W)x79.6mm(D)x29.2mm(H), which can be easily installed in the industrial or office network.

If a network environment simply needs a RS-232 interface, the JetPort 5201 is the handy solution with the easy-to-use management methods, the serial speed can support as fast as 460.8Kbps.

- Industrial PoE Switch
- IP67/68 Ethernet Switch
- Rackmount Managed Switch
- Gigabit Switch
- Redundant Switch
- Entry-Level Switch
- Networking Computer
- Communication Computer
- Ethernet I/O Server
- Serial Device Server**
- Media Converter
- Multiport Serial Card
- SFP Module
- Din Rail Power Supply

Hassle-Free Configuration

The JetPort Commander allows users to discover all JetPorts in a LAN and configure/monitor one or multiple JetPorts simultaneously. All configurations

are run-time changes without re-booting the device. The JetPort also supports web/telnet console and SNMP for extended network managements.

Flexible Serial Configuration

The JetPort supports flexible serial communication modes, including virtual com, TCP server, TCP client, UDP, and serial tunnel. The advanced settings for controlling the data communications such as TCP alive check, delimiter, and timeout are also


supported. For industrial redundant solutions, The JetPort supports to maximum 5 simultaneous connections for virtual com, TCP server, TCP client modes, to send data to 5 hosts simultaneously.

Event Warning


The Jetport 5201 supports Event warning when the pre-configured events occur; the system will send E-mail, SNMP trap and Syslog to administrators. With the event warning, administrators will be notified if

there is a change of the status on the field; thus, they're able to take the corresponding action within a short time.

JetPort 5201 Appearance

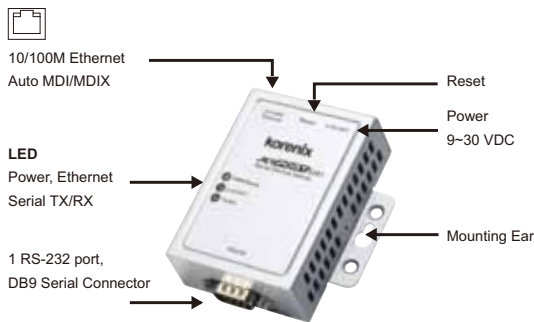

Dimensions (Unit –mm)

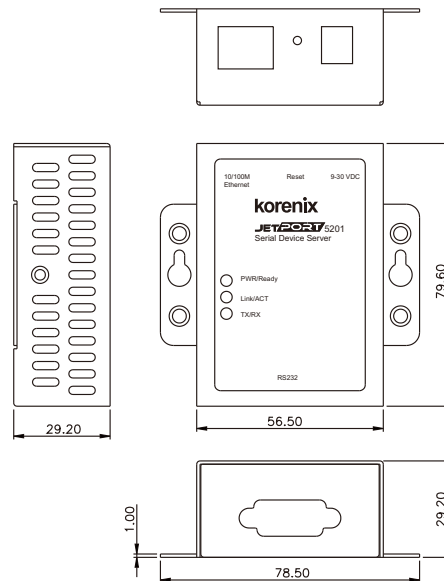

Specification

Network Interface

Ethernet: 1 x 10/100 Base TX

Connector: RJ-45

Feature: Auto MDI/MDI-X, 10/100M Auto-Negotiation

Protection: Built-in 1.5 KV magnetic isolation protection

Protocols: IP, TCP, UDP, ICMP, DHCP, BootP, ARP/RARP, Telnet, SNMP, HTTP, SNTP, SMTP

Serial Communication

Number of Ports: 1

Interface: RS-232

Connectors: Male DB9

Baud Rates: 110 bps to 460.8K bps

Data Bits: 5, 6, 7, 8

Parity: odd, even, none, Space, Mark

Stop Bits: 1, 1.5, 2

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, GND, DCD

Flow Control: XON/XOFF, RTS/CTS, DTR/DSR

Serial Line Protection: 15KV ESD

Features

LED:

Power: Startup(Red); Ready(Green)

Ethernet : 10M Link(Orange), 100M Link(Green)

Serial: Transmitting data(Green), Receiving data(Orange)

Configuration: Windows Utility-JetPort Commander, HTTP, Telnet

Serial Service: Virtual COM, TCP Server, TCP Client, TCP Tunnel and UDP

Reset: Software reload default, Hardware reset button

SNTP: For time management

Access IP Table: 16 IP addresses to prevent illegal users

Monitor: Devices' status, VCOM status

SNMP: RFC1213 MIB II, RFC1317 RS232_like and SNMP Trap

E-Mail Alert: Automatic e-mail warning by pre-defined events

System Log: Trap to Syslog server or local display

System Events:

Cold/Warm Start, Login Failed, IP and Password Changed, Access IP Blocked, Serial Port DCD/RI/DSR/CTS changed, Serial Port connected/disconnected.

Windows Utility

JetPort Commander:

Device Discovery, Auto IP, Network Setting, Device and Serial Port Setting and monitoring, Notification setting, Firmware Upgrade, Configuration Backup and Restore, Group Configuration Wizards.

Serial Service Mode:

Virtual COM, TCP Server, TCP Client, TCP Tunnel and UDP

Advanced Serial Setting:

TCP Alive Check Timeout, Inactivity Idle Timeout, Performance mode, Delimiter, Force TX Timeout for Data Packing and Force TX interval time

Group Configuration Wizard:

JetPort Commander: Group IP Wizard, Group firmware upgrade, Group Backup/Restore, VCOM and TCP Tunnel Setup Wizard

Power Requirements

System Power:

DC Jack: 9-30VDC

Power Line protection:

1 KV Burst (EFT), EN61000-4-4

0.5 KV Surge, EN61000-4-5

Power Consumption: Maximum 2.6 Watts

Mechanical

Dimensions: 78.5mm(W)x79.6mm(D)x29.2mm(H)

Regulatory Approvals:

FCC Class A, CE Class A, UL, RoHS

Environmental

Operating Temperature: 0 ~ 60°C

Operating Humidity: 5% ~ 95%, (non-condensing)

Storage Temperature: -40 ~ 85°C

Warranty: 5 years

Industrial
PoE Switch

IP67/68
Ethernet Switch

Rackmount
Managed
Switch

Gigabit Switch

Redundant
Switch

Entry-Level
Switch

Networking
Computer

Communication
Computer

Ethernet
I/O Server

Serial Device
Server

Media
Converter

Multiport
Serial Card

SFP Module

Din Rail
Power Supply

Ordering Information

JetPort 5201 1-port RS-232 Serial Device Server

Includes:

- 1-port RS-232 Serial Device Server
- Quick Installation Guide
- 100V ~ 240V power adapter
- Din-Rail kit and foot pads
- Documentation and Software CD-ROM

