

JetCon 1302 / 1302-mw / 1302-sw

Industrial 2-port Fast Ethernet to Fiber Media Converter




- Two 10/100 TX ports to One 100FX port media converter
- Supports 1.5KV Hi-Pot isolation protection
- Supports Auto MDI/MDI-X, Auto Negotiation
- Supports Multi-mode 2KM, Single-mode 30KM
- Dual modes for power input, AC18-27V/DC18-32V
- Fault Relay Output for port alarm
- Compact Aluminum case with IP-31 grade protection
- -10~70°C operating temperature for hazardous environment applications (JetCon 1302-mw/1302-sw: -40~70°C, available by request)

Overview

JetCon 1302 is not only a compact 2-port RJ45 to fiber media converter, but also a slim 3-port switch which is an ideal model that would physically fit in a network environment with limited space. The feature of fault relay alarm aims to inform you whenever there is any port link down. Just move up the DIP switch, the fault relay alarm will be functioning! Single-mode and Multi-mode fiber optic ports meet your needs for long distance transmission up to 30KM.

When you are ready to install JetCon 1302, you will find out that it can be easily wall mounted and be mounted directly on DIN rail. AC 18V~27V or DC 18V~32V is available for different operating environments. With IP 31 rigid and compact aluminum case, 1.5KV Hi-PoT isolation protection, CE/FCC regulatory approvals, and 5-year global warranty, JetCon 1302 series are your reliable choices for hazardous applications.

Dimensions (Unit –mm)

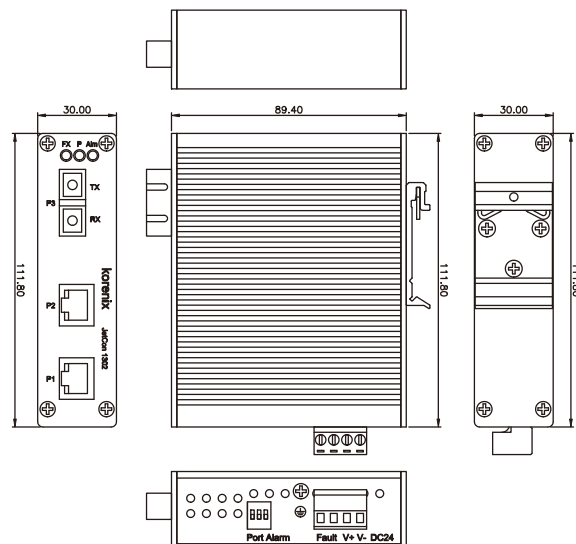

Specification

Technology

Standard:

IEEE802.3 10Base-T, IEEE802.3u 100Base-TX
IEEE802.3u 100Base-FX, IEEE802.3x flow control

Switch Technology: Store and forward technology with 3.2Gbps switch bandwidth

Aggregate System Throughput: 1.49Mpps

Interface

Number of Ports: 2 x 10/100 TX with Auto MDI/MDI-X, Auto-Negotiation functions

1 x 100Base-FX

Connectors: 10/100 Base-TX: RJ-45

100Base-FX: Duplex SC

Power/Relay: 4-pin terminal block

Cables:

RJ-45 connector: supports CAT-3, CAT-4, CAT-5 unshielded twisted pair or shielded twisted pair cable.

The link distance is maximum 100 meters SC connector:

SC Connector:

Multi-mode fiber: 50/125um or 62.5/125um

Single-mode fiber: 8/125um, 9/125um or 10/125um

Fiber Transceiver:

JetCon1302-m, Multi-mode: 2KM max. distance

Link Distance: 2KM (Max.)

Wave-length: 1310nm

Min Tx Power: -20dBm

Max Tx Power: -14dBm

Min Rx Sensitivity: 0dBm

Max Rx Sensitivity: -31dBm

Link budget: 11dBm

JetCon1302-s, Single-mode: 30KM max. distance

Link Distance: 30KM (Max.)

Wave-length: 1310nm

Min Tx Power: -15dBm

Max Tx Power: -8dBm

Min Rx Sensitivity: 0dBm

Max Rx Sensitivity: -34dBm

Link budget: 19dBm

Port Alarm DIP Switch:

DIP 1~3: Enable or disable port link down

alarm for copper port 1/2, fiber port 3

On: Enable port link down alarm

Off: Disable port link down alarm

Diagnostic LED: System: Power (green), Fault (red)

RJ-45 port: 100Mbps Link (green on)/Activity (green blinking)

10Mbps Link (yellow on)/Activity (yellow blinking)

Fiber port: Link/Activity (green)

Power Requirements

System Power: 2 pins terminal block for power input

DC 24V (18~32V) with reverse polarity protection

AC 18~27V, 47~63Hz

Power Consumption: 4.8Watts @ DC 24V

Mechanical

Installation: DIN-Rail mount

Casing: IP31 protection, aluminum case

Dimensions:

111.8mm(H) x 30mm(W) x 98.2mm(D) (with DIN rail clip)

111.8mm(H) x 30mm(W) x 89.4mm(D) (without DIN rail clip)

Weight: 374g with package

292g without package

Environmental

Operating Temperature: -10 ~ 70°C

(JetCon 1302-mw/1302-sw -40~70°C)

Operating Humidity: 0% ~ 95% (Non-condensing)

Storage Temperature: -40 ~ 80°C

Storage Humidity: 0%~ 95% non-condensing

Regulatory Approvals

EMI: FCC Class A, CE/EN55022 Class A

EMC Immunity Interface:

EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5

EN61000-4-6, EN61000-4-8, EN61000-4-11

Safety: CE/EN60950

Shock: IEC60068-2-27

Free Fall: IEC60068-2-32

Vibration: IEC60068-2-6

MTBF: 632,171 Hours, MIL-HDBK-217F GB standard

Warranty: 5 years

Ordering Information

JetCon 1302-m Industrial 2-port Fast Ethernet to Fiber Media Converter, SC, Multi-mode/2KM

JetCon 1302-s Industrial 2-port Fast Ethernet to Fiber Media Converter, SC, Single-mode/30KM

Includes:

- JetCon 1302-m / 1302-s
- Quick Installation Guide



L. Zamenhofo str. 5
LT-06332 Vilnius, Lithuania
Tel: +370 5 2032302
sales@industrialconnection.eu
www.industrialconnection.eu